



APP Copper 50 Spray

Welding copper topcoat

APP No. 210801


APP Copper 50 Spray is a fast-drying direct topcoat with 50% of metallic copper in the composition.

The product is intended for anti-corrosion protection of substrates to be welded after the application. It streamlines fusion welding without affecting the finished weld quality.

The coating formed is slightly tacky, permanently elastic and hydrophobic with strong adhesion to the substrate. A perfect choice for underbody protection in new motor vehicles.

Intended use

- + Conductive intermediate layer in tack welding.
- + Shields off welding areas.
- + Anti-corrosive protection for all types of bodywork.
- + A copper coating for refinishing and repairing defects in copper parts, like gutterwork, window flashing trim, and other copper products.

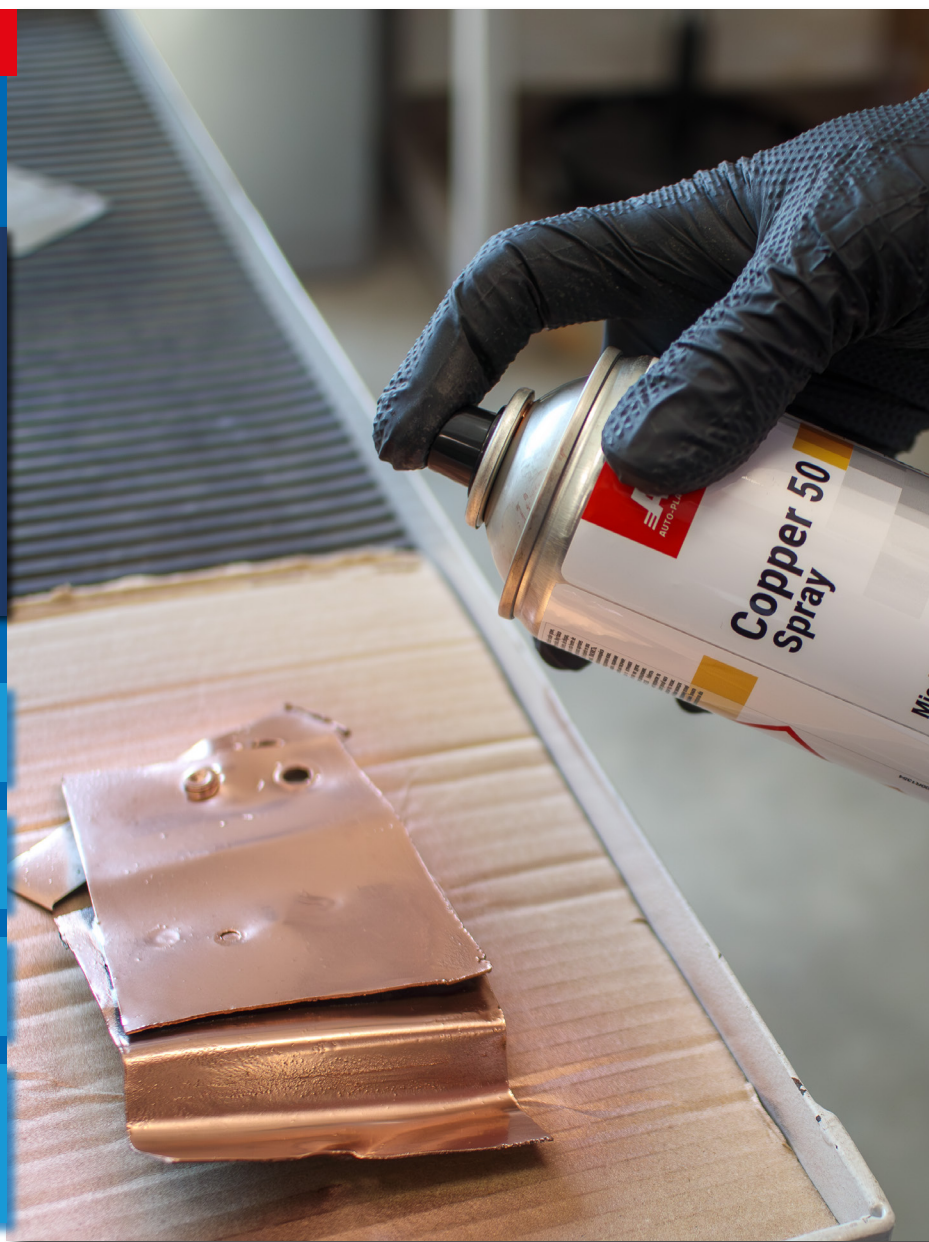


APP Copper 50 Spray


Welding copper topcoat



1-2 min



1x1



5-10 min / + 20°C



TDS & MSDS

Features:

- Produces a highly resistant synthetic resin film for long-lasting anti-corrosion protection.
- Dries quickly.
- Decorative layer applications.
- Coatable with clearcoats once dry.
- Yield: 2.5 m²/pack.
- Colour: Metallic shine copper.



APP No.	Product name	Quantity
210801	APP Copper 50 Spray - Welding copper topcoat	1 pc.