

TECHNICAL DATA SHEET

Prepared on: 24.06.2020



Revised on: 24.06.2020

Page 1 of 2

Product name: self-adhesive foam tape NO EDGE TAPE. APP No.: 070355.

Self-adhesive and flexible foam tape that does not leave sharp edges of the applied paint, used for protective purposes. It is intended to perform soft and smooth passages of the applied paint on the edges and ribbing lines during painting.


Packaging: one roll in a cardboard box.

Dimensions of tape on the roll: 15 mm x 25 m (5 x 5 m).

Structure:

1. Medium
2. Glue

- 1** Nośnik
2 Klej

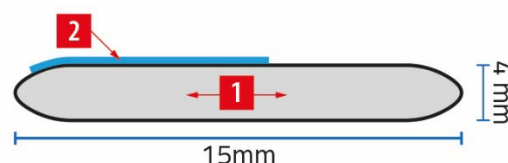

Technical specification:

Adhesive material: rubber glue.

Tape material (medium): foam.

Tape colour: white.

Tape thickness: 4 mm ($\pm 0,5$ mm).

Tape width: 15 mm (± 2 mm).

Tape length: 25 m ($\pm 0,5$ m).

Density: 30 kg/m³ (± 4 kg/m³).

Adhesion: 6 N / 25 mm.

Heat resistance: 95°C / 1h.

UV resistance: limited.

Application:

- Enables straight formation of soft edges for the passage of applied paint.
- For covering the edges and ribbing in complicated shapes to create smooth passage.
- For gap sealing, preventing the penetration of sprayed paint inside the protected space.

The information provided above is compliant with the knowledge concerning our products and the possibilities of their application. This does not guarantee specific properties or the suitability to use in specific conditions. It is necessary to follow the remarks and warnings included on product labels and in the data sheet. We shall not bear any responsibility if the outcome of the work is influenced by the factors beyond our control.

TECHNICAL DATA SHEET

Prepared on: 24.06.2020



Revised on: 24.06.2020

Page 2 of 2

Product name: self-adhesive foam tape NO EDGE TAPE. APP No.: 070355.

Properties:

- Intended for use with organic and water-soluble paint.
- The tape does not leave any adhesive traces and is resistant to increased temperature.
- A single foam tape width for all applications.


Substrate:

The surfaces on which foam tape is applied should be dry, free from dust or grease. The foam tape is intended for application on plastic, metal and glass surfaces as well as on paints and enamels.

Application:

Choose the ribbing to have the soft edge performed. Tear a desired fragment of foam tape off and remove the film protecting the adhesive. Apply foam tape gently and without stretching to the surface so that foam edge is situated along the future edge of the connection between the old and new paint. Press the foam and, if necessary, stick masking tape to it, connecting it with the previously performed masking.

Storage:



Store in clean, dry and well-ventilated spaces, at the temperature from +15°C to +25°C and relative humidity of 50%.

OHS regulations:



For professional use only.
See: text on product labels or material safety data sheet.
The user is obliged to adhere to OHS regulations in force in a given country.

The information provided above is compliant with the knowledge concerning our products and the possibilities of their application. This does not guarantee specific properties or the suitability to use in specific conditions. It is necessary to follow the remarks and warnings included on product labels and in the data sheet. We shall not bear any responsibility if the outcome of the work is influenced by the factors beyond our control.