


NTools PRD

Air Driven Reamer for Spot Welds

APP No. 139520N

NTools PRD high quality air driven reamer purposed for works related to spot welds. It is an indispensable tool in paint shops and car body garage or works related to dismantling of components installed with spot welding method.

Compact design and special clamp enables to deliver work in hard to reach places whereas soft-start ensures precise reaming.

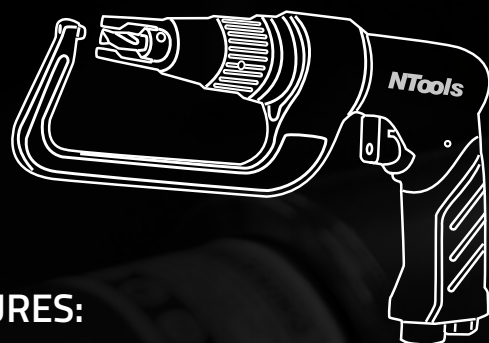

FEATURES:



Maximum depth
of metal sheet **3 mm**



Air consumption **99.1L/min.**



Working speed **1600 RPM.**



Conformance with European Standards
confirmed with CE mark.

Design:

SAFE AND PRECISE SPOT WELD REAMING

2 Pneumatic drive

Enables required pressure of the reamer (cutter) against the element, so that operator can easily remove spot welds and dismantle the given element.

1 Compact and robust body

made from high quality materials resistant to working conditions.

3 Lateral guides

for precise position of reamer (cutter) at right angle.

4 Movable detachable arm

that holds the element during reaming and enables work in hard to reach places.

5 Rubberized handle

that ensures secure grip and comfortable work.



2




3



4



5

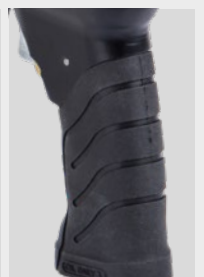

Technical Data:

NTools

NTools No. 139520N
Air Driven Reamer for Spot Welds



USE:

- Paint shops and car body garages
- Vehicle dismantling station
- Scrapyard
- Works related to dismantling of components fixed with spot welds

TECHNICAL DATA:

Working Pressure [bar]	6.3	Max. steel sheet thickness [mm]	3
Air consumption [l/min]	99.1	Noise level [dB(A)] in idle /operation	85/82
Rotational speed (RPM)	1600	Length [mm]	270
Power [kW/HP]	0.5/0.7	Weight [kg]	2,2
Compressed air quick-coupling	1/4" (outer thread)		
Reamer (cutter) [mm]	8 x 44		

Conformance with the requirements laid down in the Council Directive as of June 1989 regarding mechanical devices:

89/392/EEC, 91/368/EEC, 93/44/EEC, 2006/42/EC; ISO 8862-1 – Vibration measurement; PNEUROP 8N-1 – Acoustic pressure level

INCLUDED:

- Air driven reamer for spot welds
- Cobalt-steel cutter (8 x 44 mm)
- Allen key
- Quick coupling 1/4" (outer thread.)
- Lubricating oil (30 ml)
- User Manual



ADVANTAGES

+
Low air consumption
99.1 L/min.
compatible with compressor of standard output.

+
Soft-start
for precise initial reaming.

+
Movable detachable arm
that holds the element during reaming and enables work in hard to reach places.

+
Reaming depth control, air driven pressure
for easy reaming of welds without bottom sheet damage.

+
Compact and robust body
made from high quality materials resistant to working conditions.

APP No.	Product Description	RPM	Qty
139520N	NTools PRD - Air Driven Reamer for Spot Welds	1600	1