

New !!!



Dust Extractor Collector Unit S145EL / S145EPL

RUPES




- 1 Extraction adjustment
- 2 Smart LED Diodes:
on, water max. level, maintenance inspection required.
- 3 Automatic electric or pneumatic-electric controlled dust collector
- 4 Air filters shaking automatic system
Very low noise level 62-67 dB(A)
Water extraction possible
- 5 Additional plate and container for hose at the back

* M (EN 60335-2-69/A2) dust Class for dangerous dust of allowed max. exposure risk $\leq 0.1 \text{ mg/m}^3$.
Option available on order.


New !!!

RUPES

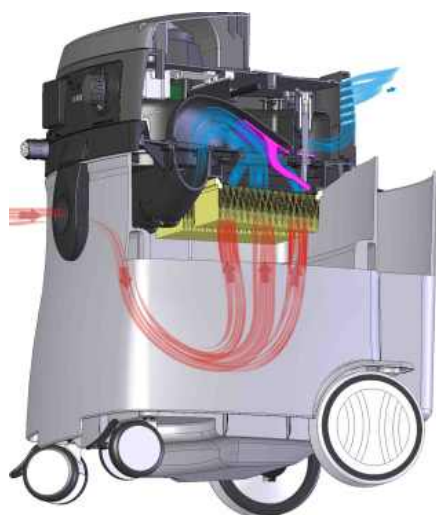

Dust extraction process:

Collection of air with dust follows to the bag; then air subjects to filtering with two filters and is extracted out.

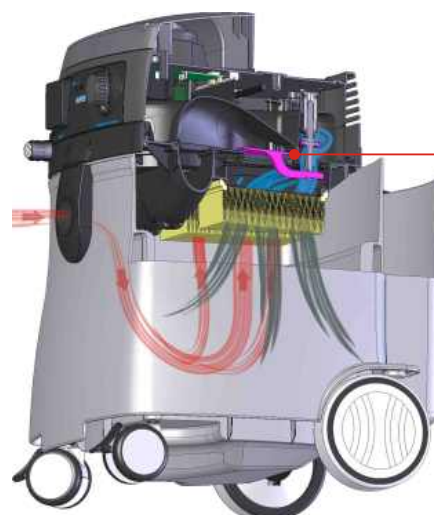

Filters automatic shaking off:

Extractor unit has programmed periodical air filters shaking off; solenoid valve set cuts out outflow of clean air; next air flows back to air filters from the top and removes dust.

TECHNICAL DATA	S145EL/S145EPL
APP No.	141100/1411100
Voltage	230 V, 50/60 Hz
Extractor Power	1 x 1200 W
Socket power (max)	1 x 2400 W
Extraction efficiency	165 m ³ /h
Pressure mm/H ₂ O	2000
Weight	13 kg
Noise	62-67 dB(A)
EN 60704-3	
Bag capacity	5 kg
Container fluid capacity	25 l
Pneumatic automatic gear	YES for EPL version
Filtrating area	1m ²

ACCESSORIES	
60042.1108/5	Filtering paper bag
6267.092/C	Tripod
629GAT02001	29 mm extracting hose with end: 5 mm
629GAT02001	29 mm extracting hose with pneumatics:*2 in 1";5 m
629GAT02001	29 mm extracting hose with pneumatics:*2 in 1";8 m
60036.1108	Paper air polyester filter (main) standard
60065.1108	Paper air polyester filter (main)



APP Sp. z o.o.
ul. Przemysłowa 10, 62-300 Września
Biuro Obsługi Klienta: tel. 061/437 00 20, fax 061/437 00 21

APP
AUTO-PLAST PRODUKT